superbrightleds.com

User Manual

JB-JK-H20

Important: Read all instructions prior to installation.

Jeep Wrangler JK Hood Brackets

JB-JK-H20

Safety and Notes

- To reduce risk of electric shock, ensure that battery is disconnected before performing any installation procedures.
- Avoid looking directly into light when illuminated.
- Modifications to the light or improper installation—not consistent with guidelines of this document—will void warranty.
- Ensure that your vehicle is powered off when wiring and making electrical connections.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

Specifications

Environmental Specifications	
Material	Steel bracket, stainless steel hardware
Vehicle Compatibility	2007–2017 Jeep Wrangler (JK)

Mounting Installation
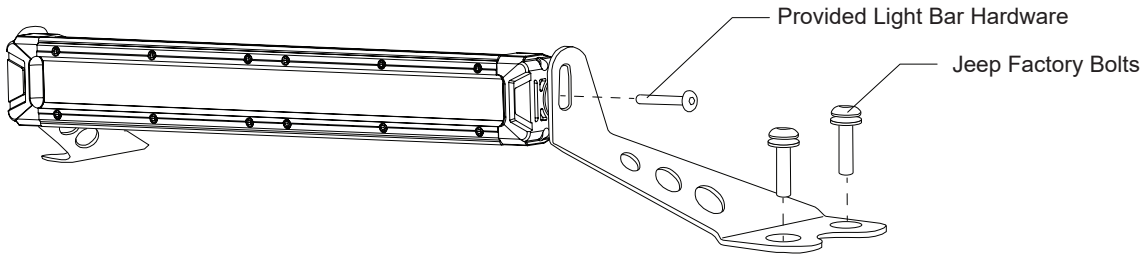
1. Gather Tools and Materials: A T40 Torx bit and wrench set is needed. Cable ties for cable management.
2. Remove factory bolts from hood hinges.
3. Position the brackets over the openings and reuse the factory bolts to secure in place (do not fully tighten).
4. Using the hardware provided, install your desired 20” light bar to the brackets.
5. Once the light bar is successfully mounted, tighten down your factory bolts until secure.
6. Complete wiring of light bar.