

**Important:** Read all instructions prior to installation.

## PN-STRB-x9W 9-Watt Single-Color LED Light Head



### Parts Included

- 1- PN-STRB-x9W Strobe Light Head
- 1- Instructional Sheet
- 1- Mounting Screws
- 1- Foam Gasket

### Wiring

- Red – Power In(+)
- Black – Ground In (-)
- Yellow – Pattern Select (Momentary +)
- White – Sync Output
- Brown – Sync Input




### Operation

This light head can be synchronized with up to 3 others of the same light head (4 total). In order to sync, the lights should be on the same pattern to start. Connecting the yellow wire to the power for one second will select next flash pattern. Lights will return to the last pattern selected when power is cycled.




**Warning:** Before making any connections to the automotive wiring, always disconnect the battery negative terminal

### Dimensions

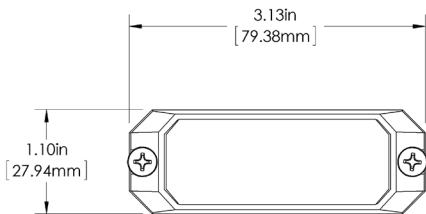

### INCLUDED PARTS

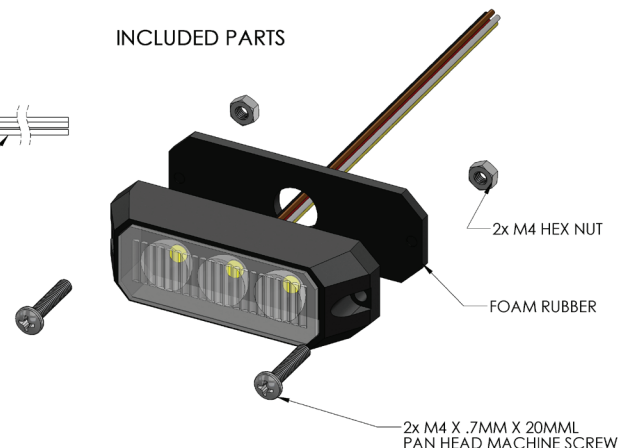

### Specifications

PN-STRB-x9W	
Voltage	10~30VDC
Current Typical	380mA
IP Rating	Waterproof IP67
Dimensions	3.13in (79.4cm) x 1.10in (2.79cm) x 0.85in (2.16cm)
Mounting Type	Surface Mount
Number of LEDs	3 x 3-Watt
Wire Length	5.25in (13.3cm)
Housing Material	Painted Aluminum
Lens Material	Polycarbonate
Recommended Fuse Rating	1A/Light Head
Operating Temperature	-31 °F – +176 °F (-35 °C – +80 °C)
Weight	3 oz (85 g)

### Flash Patterns

1 – Random	10 – Single
2 – Single	11 – Double
3 – Double	12 – Quad
4 – Quad	13 – Accelerator
5 – Pulse	14 – Quad/Single
6 – Accelerator	15 – Pulse/Single
7 – Quad Burst	16 – Single
8 – Double/Accelerator	17 – Single
9 – Quad/Accelerator	18 – Off



**Important:** Read all instructions prior to installation.

## PN-STRB-x9W 9-Watt Single-Color LED Light Head

### Wiring Diagram

### All Synchronized

