


**Important: Read all instructions prior to installation.**

## Linear High Bay LED Light


### Product

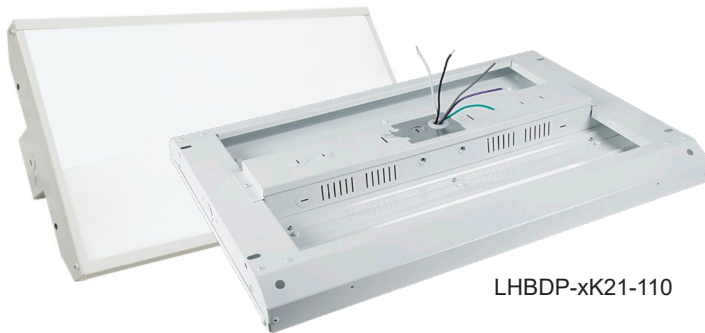

### Mounting Options



LHBD-PM  
Pole Mounting  
(optional)



Suspension Chain  
(included)


### Safety and Notes

- This product should be installed by a fully certified electrician in accordance with local building and electrical codes.
- Due to risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Failure to properly support the fixture during installation may cause damage or injury, for which the manufacturer is not responsible. Ensure the mount is securely attached and will support the weight of the fixture.

### Optional Accessories

1 - Rigid Conduit Mounting (LHBD-PM)

### Wiring Diagram


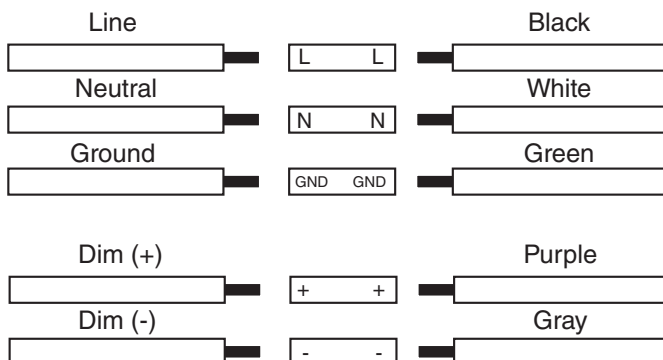


**Important:** Read all instructions prior to installation.

## Linear High Bay LED Light

### Suspension Chain Mounting Installation

1. Install suspension hooks (not provided) 24" or 46" apart on ceiling. Ensure that mounting hooks can support weight of fixture.
2. Hang suspension chains on the suspension hooks.
3. Attach the v-hooks into the holes on each side of the fixture.
4. Hang the fixture by hooking suspension chains onto v-hooks as shown.
5. Remove screw from wire access plate to make connections.

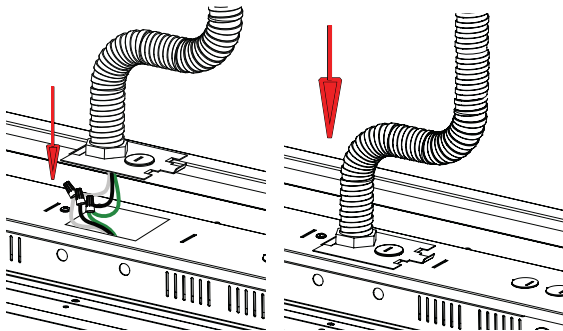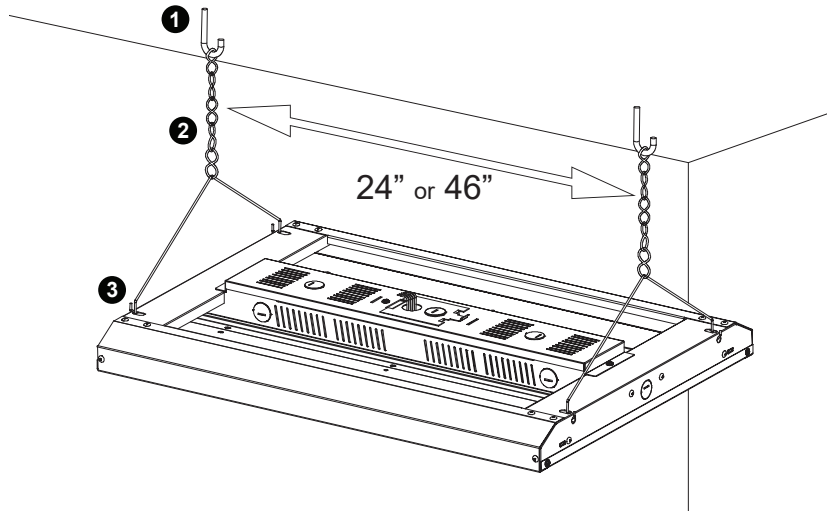

### Rigid Conduit Mounting Installation

1. Remove power from circuit.
2. Run power wires through rigid conduit. Make sure enough wire hangs from bottom of conduit to make electrical connections.
3. Attach rigid conduit to mounting junction box.
4. Pull hot, neutral, and ground wires from LED drivers through the knockout on wire access plate.
5. Attach fixture to the mounting junction box using 4x M6 hex head bolts, lock washers, and flat washers.
6. Using wire nuts, connect hot, neutral, and ground wires inside mounting junction box.
7. Install side plates to mounting junction box using provided screws.

