

**Important:** Read all instructions prior to installation.

## LED Landscape Path Light

### Safety and Notes

- For use with outdoor, low-voltage landscape lighting systems ONLY.
- Not for use with submersible or pool/spa equipment.
- Do not submerge in water, the product can be damaged.
- For low voltage use only. Power supply voltage must match fixture.

### App Control

Compatible with Smart Life app. Light must be on when attempting to pair and should flash blue when in pairing mode. If necessary, the pairing button on the top of the light (under the glare shield) can be used to pair.




App Store



Google Play





### Assembly

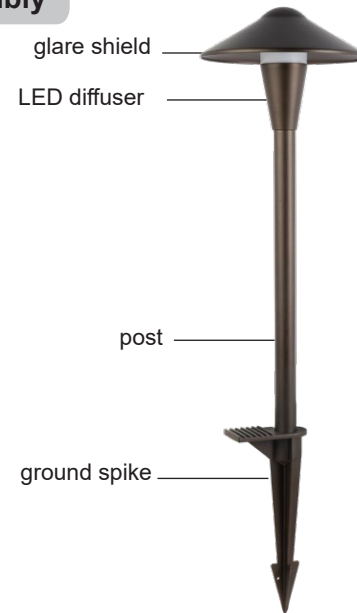

Note: Appearance may vary by model.

### Installation Instructions

1. Safely power lights and pair lights with smart device, removing from power afterward.
2. Lay fixtures out as they will be installed.
3. Run landscape wire (WP14-2DB or WP12-2DB) from power supply past each light. Wire must be within 3" of mounting stake to allow power connections to be made.
4. Use waterproof connectors to connect lights to supply wires as well as wires running to additional lights.
5. Using a small shovel, loosen the ground where fixture will be installed. Press stake into ground. Wetting the ground can loosen soil to ease installation if needed.  
Note: Do not use a hammer or exert force on the fixture by using it to drive the stake into the ground as this may cause damage.
6. Turn on power supply and ensure all fixtures are working. If one or more individual fixtures are not working, check each connection. It is recommended to wrap all connections in electrical or self-fusing tape.
7. Bury landscape wire, fixture pigtails, and connectors. A depth of 3" is recommended. Wires and connectors can also be covered by mulch or stone.
8. Use app to adjust settings.

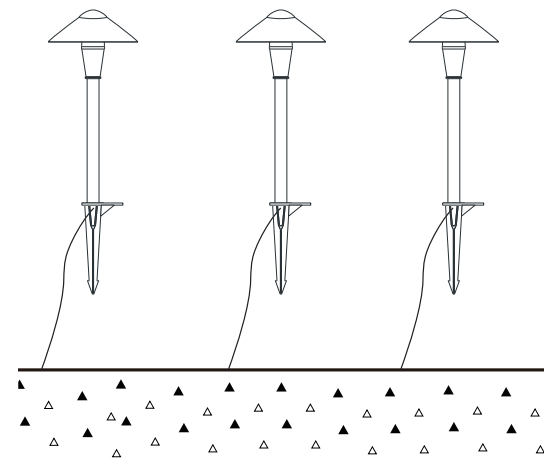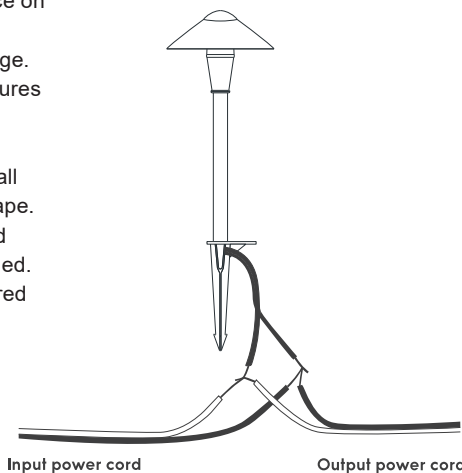

Note: LFA-P02 shown, others are similar.

