

Important: Read all instructions prior to installation.

RGBCCT Smart Slim LED Downlight



Safety and Notes


- Product should be installed and serviced in accordance with all applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures. Do not use if cable, light, or junction box are damaged.
- Avoid looking directly into lamp when illuminated.
- Connect only to indicated voltage and in an appropriate environment to avoid potential damage or personal injury. This product is rated for damp locations.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- Light requires a 2.4 GHz Wi-Fi network and the Smart Life app in order to adjust settings.

Specifications

Environmental Specifications	
Operating Temperature	-4°–104° F (-20°–40° C)
IP Rating	IP20


Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

Wiring Diagram

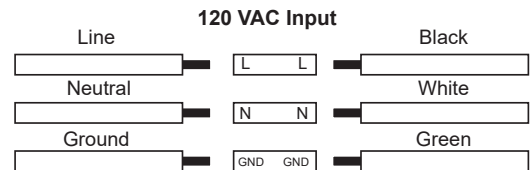

Installation

1. Turn supply power to circuit off.
2. Measure and cut hole according to model.
3. Remove junction box cover and make electrical connections.
4. If not already done, pair light to app.
5. Mount light and reapply supply power.

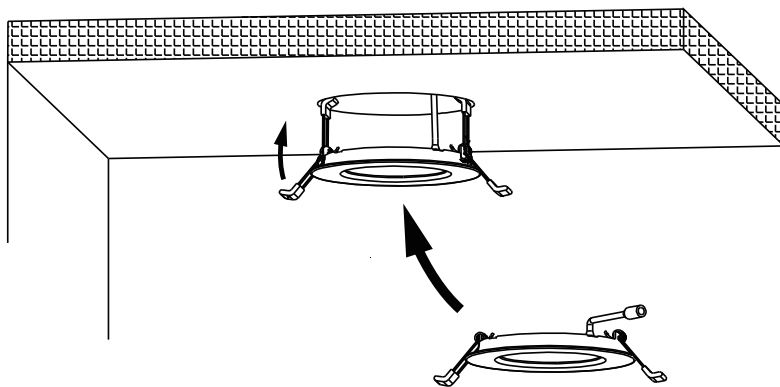

Pairing with App

1. Download the Smart Life app and register an account if needed.
2. Press “+” in the top right corner and navigate to lighting devices.
3. Switch power to the light on and off quickly 5 times. Light should flash to indicate it is ready to be paired.
4. Click “confirm light blinks rapidly” and input Wi-Fi password.
Note: This will only work on 2.4 GHz networks.
5. Once connection is made, adjust settings as desired.

Smart Life for iOS

Smart Life for Android



Model	Cutout Size
DLS4D-RGBCCT-10W	4.25 in. (108 mm)
DLS6D-RGBCCT-12W	6.25 in. (158 mm)