

Important: Read all instructions prior to installation.

Amber Type B LED T8 Tube



Safety and Notes

- Product should be installed in accordance with all applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into the lamp when illuminated.
- Designed for direct wire installation only, bypassing existing ballasts where applicable.

Specifications

Specifications	T8BDA-30K18A
Operating Temperature	-4°–113° F (-20°–45° C)
IP Rating	IP20
Dimmable	No
Connection Type	G13 dual ended


Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

Modification Label

The included label needs to be placed onto the fixture in a location that is visible during retrofit that has the following caution.


WARNING:

This luminaire has been modified to operate LED lamps. Do not attempt to install or operate fluorescent lamps in this luminaire. In the future use only bypass lamps such as T8BDA-30K18A. For ordering info: please call or visit www.superbrightleds.com



Installation Instructions

1. Remove power from fixture before replacing lamps or modifying ballast.
2. Bypass ballast and use wire nuts to cover any exposed wire ends.
3. Install tubes into fixture.
4. Install retrofit label in a visible location on the fixture.

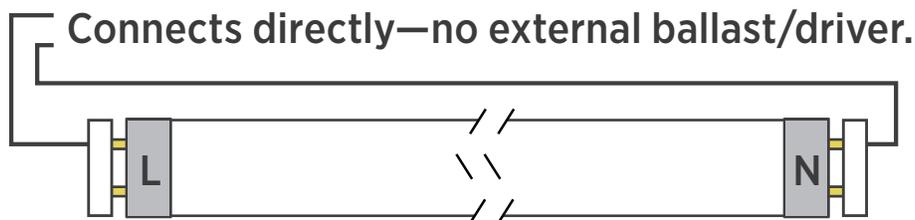

Dual-Ended Type B Installation