

Important: Read all instructions prior to installation.

LED Wraparound Strip Light Fixture

Safety and Notes


- Product should be installed in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Verify that supply voltage is correct by comparing it with the luminaire label information before installation.
- All wiring connections should be capped with UL approved wire connectors.
- Avoid looking directly into the lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture.
- Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- Account for small parts and destroy packing material, as these may be hazardous to children.




WRL-SW3C65

Installation Instructions (Surface/Junction Box Mount)


1. Remove supply power.
2. Remove lens from light using included suction cup on either end.
3. If surface mounting, measure distance between mounting holes, then mark and drill holes.
4. Connect wiring if powering through junction box.
5. Mount to surface (WRLL) or junction box (WRL) securely.
6. Select CCT and wattage using switches on driver.
7. Reinstall lens.
8. If using power cord accessory, plug cord into receptacle after connecting to light.
9. On linkable model, connect additional lights with accessory interconnect cables or butt connectors before restoring supply power.

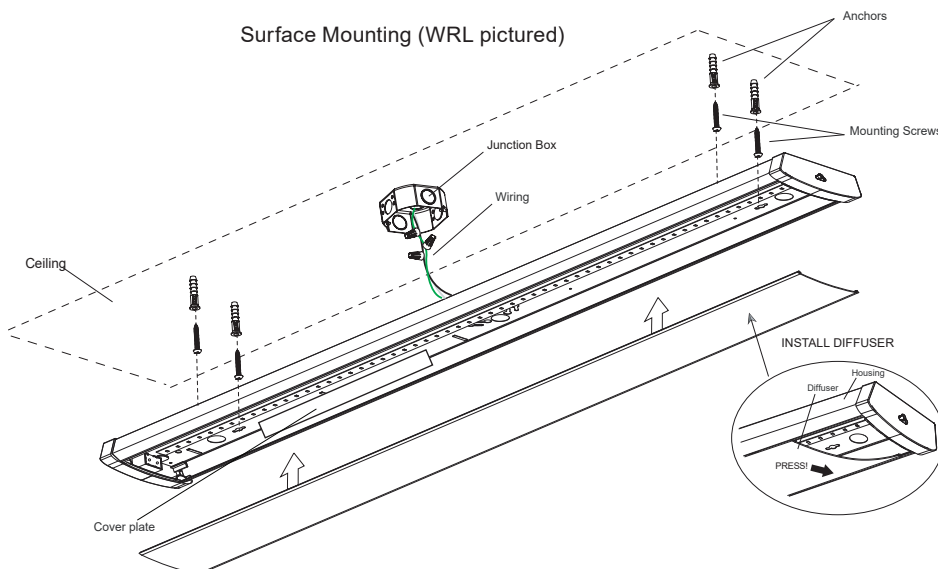

Junction Box Mounting (WRL only)

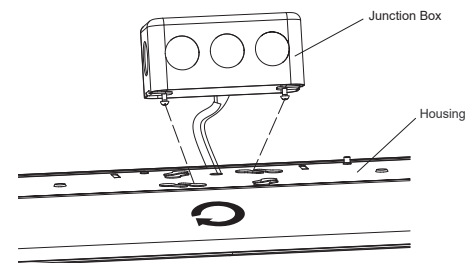

WRLL Only

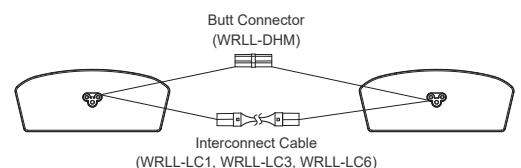

¹WRL-SW3C65 only
²WRLL-SW3C65 only



Rev Date: V2 01/24/2022

4400 Earth City Expy, St. Louis, MO 63045

• 866-590-3533


• superbrightleds.com

Important: Read all instructions prior to installation.


LED Wraparound Strip Light Fixture

Installation Instructions (Optional Suspension Kit, WRLL only)

1. Remove supply power.
2. Measure distance between suspension mounting holes, then mark and drill holes.
3. Remove lens from light using included suction cup on either end.
4. Connect wiring.
5. Select CCT and wattage using switches on driver.
6. Reinstall lens.
7. Hang light securely.
8. For power cord accessory, plug cord into receptacle after connecting to light.
9. Connect additional lights with accessory interconnect cables or butt connectors before restoring supply power.

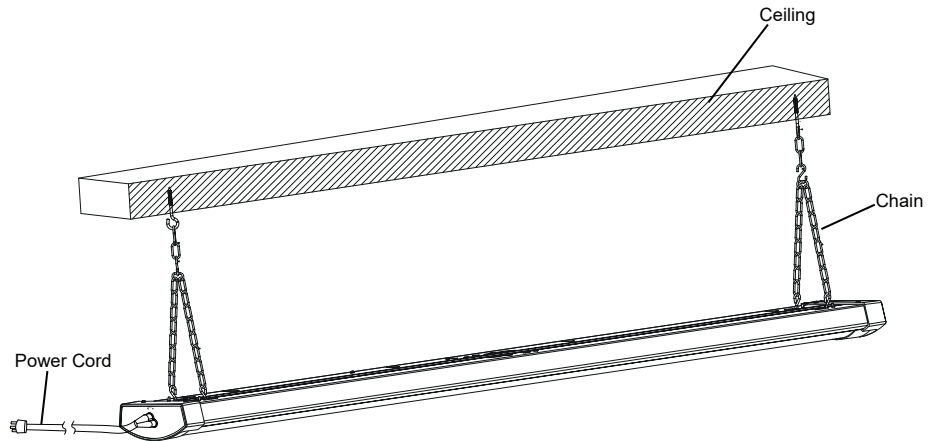


Linkable Model Only

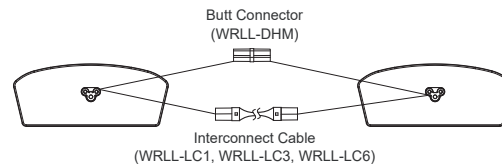


Wiring Diagram (WRL only)

120–277 VAC Input

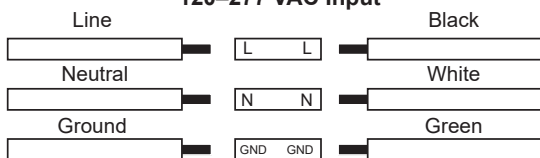

0–10 V Dimming



¹WRL-SW3C65 only

²WRLL-SW3C65 only



Rev Date: V2 01/24/2022

4400 Earth City Expy, St. Louis, MO 63045

• 866-590-3533

• superbrightleds.com